




- 柔光片
 - 防眩网
 - 防眩杯(亮银)
 - 防眩杯(哑黑)
 - 防眩杯(白色)
- *可选配件

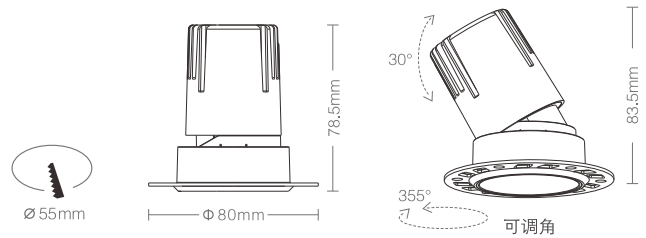

产品特性

灯具颜色: 金属灰+白色面板
 主体材质: 压铸铝
 光学系统: 透镜+防眩杯
 灯具外观: 金属质感
 投射方向: 垂直0~30°、水平0~355°
 防护等级: IP20 可选配IP44防水组件
 环境温度: -20°~40°
 重量: 130g

产品规格

开孔尺寸: Ø55mm
 功率: 5W
 光束角度: 15°、24°、36°、60°
 天花厚度: 2mm~25mm
 安装方式: 嵌入式
 吊顶空间: 大于100mm
 防眩角度: 40°

输入电压: 220~240V~50Hz
 输入电流: 25mA
 显指: Ra92
 色温: 2700K、3000K、3500K、4000K
 光通量: 318lm、332lm、355lm、368lm (15°)
 350lm、364lm、390lm、404lm (24°)
 373lm、389lm、416lm、431lm (36°)
 327lm、341lm、365lm、379lm (60°)

以下可调光款为可控硅调光; 0~10V调光:T改为M

光束角	色温	型号	h(m)	D(cm)	average (lx)	center (lx)	光通量图
15°	2700K	TSF7055W05-TB2715	1.0	29	1994	2863	
	3000K	TSF7055W05-TB3015	1.0	29	2077	2982	
	3500K	TSF7055W05-TB3515	1.0	29	2223	3191	
	4000K	TSF7055W05-TB4015	1.0	29	2306	3310	
15°	2700K	TSF7055W05-NB2715	2.0	57	499	716	
	3000K	TSF7055W05-NB3015	2.0	57	519	746	
	3500K	TSF7055W05-NB3515	2.0	57	556	798	
	4000K	TSF7055W05-NB4015	2.0	57	577	828	
15°	2700K	TSF7055W05-TB2715	3.0	86	222	318	
	3000K	TSF7055W05-NB3015	3.0	86	231	331	
	3500K	TSF7055W05-TB3515	3.0	86	247	355	
	4000K	TSF7055W05-NB4015	3.0	86	256	368	
15°	2700K	TSF7055W05-TB2715	4.0	114	125	179	
	3000K	TSF7055W05-NB3015	4.0	114	130	186	
	3500K	TSF7055W05-TB3515	4.0	114	139	199	
	4000K	TSF7055W05-NB4015	4.0	114	144	207	
24°	2700K	TSF7055W05-TB2724	1.0	39	1254	1833	
	3000K	TSF7055W05-TB3024	1.0	39	1306	1909	
	3500K	TSF7055W05-TB3524	1.0	39	1397	2043	
	4000K	TSF7055W05-TB4024	1.0	39	1449	2119	
24°	2700K	TSF7055W05-NB2724	2.0	79	313	458	
	3000K	TSF7055W05-NB3024	2.0	79	326	477	
	3500K	TSF7055W05-NB3524	2.0	79	349	511	
	4000K	TSF7055W05-NB4024	2.0	79	362	530	
24°	2700K	TSF7055W05-TB2724	3.0	118	139	204	
	3000K	TSF7055W05-NB3024	3.0	118	145	212	
	3500K	TSF7055W05-TB3524	3.0	118	155	227	
	4000K	TSF7055W05-NB4024	3.0	118	161	236	
24°	2700K	TSF7055W05-TB2724	4.0	158	78	115	
	3000K	TSF7055W05-NB3024	4.0	158	82	119	
	3500K	TSF7055W05-TB3524	4.0	158	87	128	
	4000K	TSF7055W05-NB4024	4.0	158	91	133	
36°	2700K	TSF7055W05-TB2736	1.0	62	610	939	
	3000K	TSF7055W05-TB3036	1.0	62	635	978	
	3500K	TSF7055W05-TB3536	1.0	62	679	1047	
	4000K	TSF7055W05-TB4036	1.0	62	705	1086	
36°	2700K	TSF7055W05-NB2736	2.0	123	152	235	
	3000K	TSF7055W05-NB3036	2.0	123	159	245	
	3500K	TSF7055W05-TB3536	2.0	123	170	262	
	4000K	TSF7055W05-NB4036	2.0	123	176	271	
36°	2700K	TSF7055W05-TB2736	3.0	184	68	104	
	3000K	TSF7055W05-NB3036	3.0	184	71	109	
	3500K	TSF7055W05-TB3536	3.0	184	76	116	
	4000K	TSF7055W05-NB4036	3.0	184	78	121	
36°	2700K	TSF7055W05-TB2736	4.0	246	38	59	
	3000K	TSF7055W05-NB3036	4.0	246	40	61	
	3500K	TSF7055W05-TB3536	4.0	246	43	65	
	4000K	TSF7055W05-NB4036	4.0	246	44	68	
60°	2700K	TSF7055W05-TB2760	1.0	91	315	475	
	3000K	TSF7055W05-TB3060	1.0	91	328	495	
	3500K	TSF7055W05-TB3560	1.0	91	351	530	
	4000K	TSF7055W05-TB4060	1.0	91	365	550	
60°	2700K	TSF7055W05-NB2760	2.0	181	79	119	
	3000K	TSF7055W05-NB3060	2.0	181	82	124	
	3500K	TSF7055W05-TB3560	2.0	181	88	132	
	4000K	TSF7055W05-NB4060	2.0	181	91	137	
60°	2700K	TSF7055W05-TB2760	3.0	271	35	53	
	3000K	TSF7055W05-NB3060	3.0	271	37	55	
	3500K	TSF7055W05-TB3560	3.0	271	39	59	
	4000K	TSF7055W05-NB4060	3.0	271	41	61	
60°	2700K	TSF7055W05-TB2760	4.0	362	20	30	
	3000K	TSF7055W05-NB3060	4.0	362	21	31	
	3500K	TSF7055W05-TB3560	4.0	362	22	33	
	4000K	TSF7055W05-NB4060	4.0	362	23	34	